



# FERRO TORRE



## FERROZINC



Materia Prima:  
Acero galvanizado  
ASTM A653 - G 40

- ▶ Ancho útil: 740 mm
- ▶ Altura onda: 16.5 mm
- ▶ Espesor: 0.20 mm

Longitudes estandar:

- 2.40 m (8 pies)
- 3.00 m (10 pies)
- 3.60 m (12 pies)
- 4.20 m (14 pies)
- 5.00 m (16.4 pies)
- 6.00 m (20 pies)

\*Longitudes especiales bajo pedido

Usos:

- ▶ Viviendas económicas
- ▶ Galpones avícolas
- ▶ Construcciones avícolas
- ▶ Escuelas
- ▶ Paredes


Quito:

(+593 2) 240 4101  
(+593 9) 9972 7718

Guayaquil:

(+593 4) 501 2057  
(+593 9) 9972 7719

## CARACTERÍSTICAS

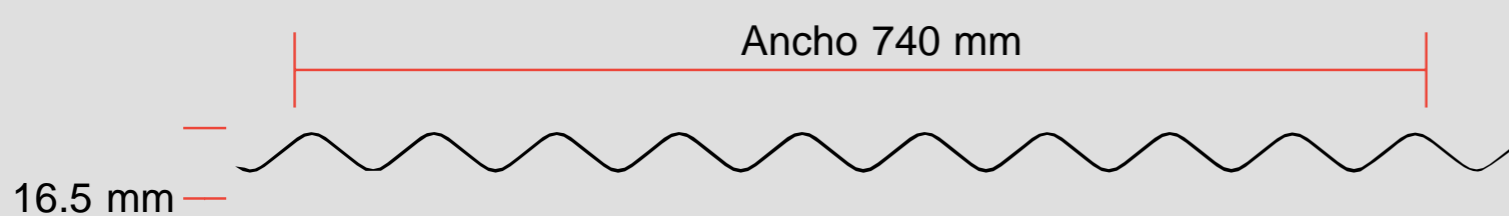

### INFORMACIÓN TÉCNICA

ESPESOR	PESO	ANCHO ÚTIL	SEPARACIÓN APOYOS
mm	kg/pie	mm	mm
0.20	0.43	740	800

NOTA: Cubierta inaccesible



### ACCESORIOS DE FIJACIÓN



Perno autoperforante (metal - madera)



Clavo tipo paraguas



[www.ferrotorre.com](http://www.ferrotorre.com)



[ferrotorre.ec](http://ferrotorre.ec)